


SINGLE PHASE HYBRID INVERTER

SE 8/10KHB-T/EU

Energy Storage Inverter

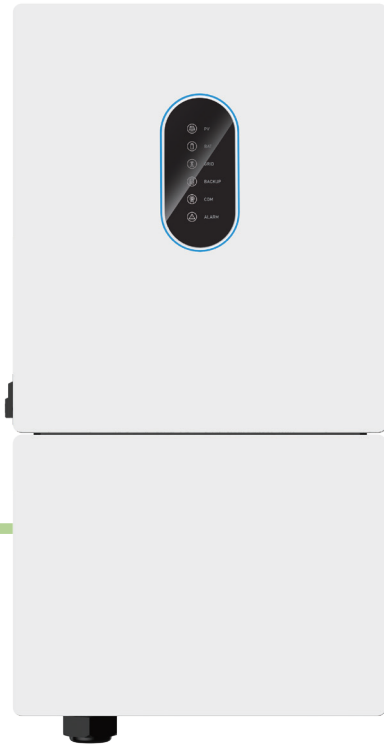

MAXIMIZE PV INPUT POWER

- Up to 200% oversizing allowed with 3 MPPTs
- Support high power module with 30A PV input current
- Support AC coupled solar input



FLEXIBLE BATTERY CONFIGURATION

- Support 40-64V Lithium or Lead-acid battery
- Maximum battery charge/discharge current of 210A



VERSATILE APPLICATIONS

- Stackable up to 9 units
- Standby generator connection for whole-home back up
- Four application modes
- Remote configuration and upgrade



STABLE OUTPUT POWER

- Continuous 110% of nominal AC power
- Seamless backup transition (<10ms)



Model	SE 8KHB-180-T/EU	SE 10KHB-210-T/EU
Efficiency		
Max. Efficiency (PV to AC)	98.0%	
Max. Efficiency (BAT to AC)	94.5%	
Input (PV)		
Max. PV Configuration	200%	
Max. PV Input Power	12,000W	15,000W
Max. PV Voltage	600V	
Start-up Voltage	90V	
MPPT Operating Voltage Range	70V-540V	
Max. Input Current per MPPT	30A/22A/22A	
Max. Short Circuit Current per MPPT	40A/30A/30A	
String per MPPT	6 (2/2/2)	
Nos. of MPPT	3	
Input/Output (BAT)		
Battery Type	Lithium-ion/Lead-acid	
Nominal Battery Voltage	48V	
Battery Voltage Range	40V-64V	
Max. Charge/Discharge Current	210A/180A	210A/210A
Max. Charge/Discharge Power	10,000W/8,000W	10,000W/10,000W
Output (Grid)		
Nominal AC Output Power	8,000W	10,000W
Max. AC Output Apparent Power	8,800VA	11,000VA
Max. AC Output Power (PF=1)	8,800W	11,000W
Max. AC Output Current	40A	50A
Nominal Grid Voltage	Single Phase 220V/230/240V, L+N+PE	
Grid Voltage Range	150V-300V (Adjustable)	
Nominal Grid Frequency	50Hz/60Hz	
Grid Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)	
Power Factor	> 0.99 @rated power (Adjustable 0.8 LD - 0.8 LG)	
THDI	<3% (Rated Power)	
Output (Back up)		
Nominal Output Power	8,000W	10,000W
Nominal Output Current	34.8A	43.5A
Peak Output Apparent Power (1s)	16,000VA	20,000VA
Nominal Output Voltage	Single Phase 220V/230/240V, L+N+PE	
Nominal Output Frequency	50Hz/60Hz	
Transfer Time	<10ms	
THDV	<3% @100% R Load	
Protection		
Protection Category	Class I	
DC Switch	Yes	
Anti-islanding Protection	Yes	
AC Overcurrent Protection	Yes	
DC/AC Overvoltage Protection	DC Type II, AC Type III	
AC Short Circuit Protection	Yes	
DC Reverse Protection	Yes	
Surge Arrester	DC Type II, AC Type II	
Insulation Resistance Detection	Yes	
Leakage Current Protection	Yes	
AFCI	Optional	
Generator	Yes	
General		
Max. Operation Altitude	4000m (>2000m derating)	
Ingress Protection Degree	IP65	
Operating Temperature Range	-25°C~60°C (>45°C derating)	
Relative Humidity	0~100%	
Cooling	Fan Cooling	
Mounting	Wall bracket	
Dimensions (W*H*D)	420mm*800mm*240mm	
Weight	39Kg	
PV Connection Way	Terminals	
HMI & COM		
Display	Bluetooth & APP + LED , LCD (optional)	
Communication Interface	RS485/CAN (for BMS), DRM/RS485 (for Meter), RS485 Optional: Wi-Fi/GPRS/LAN	
Certification		
Safety	IEC 62109-1&2	
Grid	IEC 61727/62116, AS 4777.2, NRS 097-2-1	
Warranty	5 Years	

- Remarks :**
- The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

DATA LOGGER V1000+



- Built-in web server for LAN monitoring
- 12 Months of data storage
- Automatic network clock synchronization
- RS485 interface for inverter connection
- Standard RJ45 patch cable
- Power export control supported

Model	V1000+
Connection	Inverter: RS485 Router: RJ45
Access Number	40pcs
Transmission Maximum Distance	1200m
Display	LED
Input	
Input Voltage	Input: AC 90V-250V 50/60Hz Output: DC 5V
Static Current Consumption	1A
General	
Operating Temperature	-25°C~55°C
Humidity	10%~95% relative humidity, no condensation
IP Rating	IP20
Dimension (L*W*H)	118mm*78mm*29mm
Certification	
Safety	FCC, CE, ROHS



www.senergytec.com

Shenzhen Senergy Technology Co., Ltd.

Tel: +86-755-8524-5541 ext. 2800

Email: salesglobal@senergytec.com

Address: 11th floor, Building 6, Skyworth Innovation Valley, No. 8 Tangtou No. 1 Road, Bao'an District, Shenzhen, P.R.China