

## SE 2/3/3.6/3.68/4KTL-S1/G3

Application: Residential Use



### Superior Performance

- Maximum efficiency of 97.8%
- Large string current, compatible with large PV modules
- Wide voltage range, compatible with various power grids




### High Reliability

- IP66 protection level for outdoor installation
- Optional: DC/AC Type II SPD
- Optional: AFCI 2.0 function



### Intelligent Maintenance

- Power consumption monitoring
- Remote configuration and upgrade
- Quick commissioning via mobile app
- Multiple I/O and communication configurations

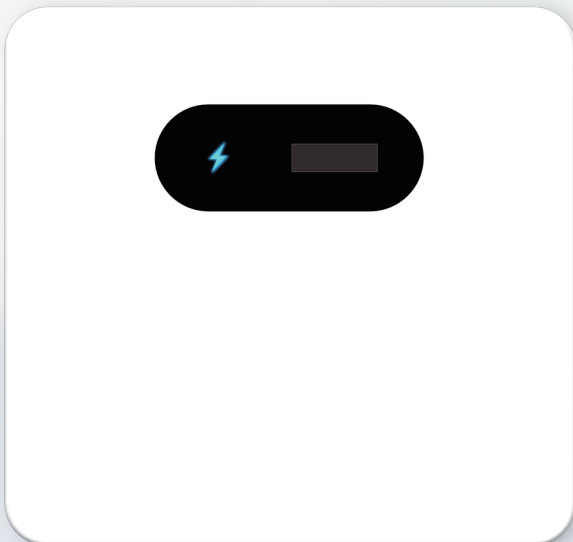

SINGLE  
PHASE &  
SINGLE  
MPPT



SE 2KTL-S1/G3

SE 3KTL-S1/G3

SE 3K6TL-S1/G3

SE 3K68TL-S1/G3

SE 4KTL-S1/G3

**Efficiency**

Max. Efficiency	97.8%
Eur. Efficiency	97.0%

**Input (PV)**

Max. Input Voltage	550V
Max. PV Configuration (STC)	150%
Rated Input Voltage	360V
Max. Input Current	20A
Max. Short Circuit Current	30A
Start Input Voltage	50V
MPPT Operating Voltage Range	40V-540V
Number of MPPTs	1
No. of PV Strings	1

**Output (Grid)**

Rated AC Active Power	2,000W	3,000W	3,600W	3,680W	4,000W
Max. AC Apparent Power	2,200VA	3,300VA	3,960VA	4,048VA	4,400VA
Max. AC Output Current	10A	15A	18A	18.4A	20A
Rated AC Voltage	220V/230V/240V, L+N+PE				
AC Voltage Range <sup>①</sup>	160V-300V (Adjustable)				
Rated Grid Frequency	50Hz/60Hz				
Grid Frequency Range <sup>②</sup>	45Hz-55Hz/55Hz-65Hz (Adjustable)				
THDI	<3%@Rated Power				
DC Current Injection	<0.5%@Rated Current				
Power Factor	> 0.99@Rated power (Adjustable 0.8 LD - 0.8 LG)				

**Protection**

DC Switch	Yes
Anti-Islanding Protection	Yes
AC Overcurrent Protection	Yes
AC Short Circuit Protection	Yes
DC Reverse Protection	Yes
Surge Arrester	DC Type III (Type II optional)/AC Type III (Type II optional)
Insulation Detection	Yes
Leakage Current Protection	Yes
AFCI 2.0	Optional
PID Recovery	Optional
String Intelligent Monitoring	Yes
Consumption Monitoring	Optional

**General**

Topology	Transformerless
IP Rating	IP66
Night Self Consumption	<1W (Standard)
Cooling Method	Natural Cooling
Operating Temperature Range	-25 C -60 C
Relative Humidity Range	0-100%
Max. Operating Altitude	4000m
Dimensions (W*H*D)	270mm*255mm*135mm
Weight	4.4Kg

**HMI & COM**

Display	Wireless & APP+LED, LCD (Optional)
Communication Interface	RS485/Wi-Fi/4G/LAN

**Certification**

Safety	IEC 62109-1, IEC 62109-2
Grid Code	IEC 61727/62116, IEC 60068, IEC 61683, VDE 4105, PORTARIA n°140, PORTARIA n°515
Warranty	5 Years/10 Years (Optional)

Remarks: · <sup>①②</sup>The range of output voltage and frequency may vary depending on different grid codes.  
· Specifications are subject to change without advanced notice.



www.senergytec.com



salesglobal@senergytec.com



+86-755-8524-5541 ext. 2800



Senergy

