

SE 5/6/8/10KHB-D3P

Application: Residential Use



Excellent Performance

- Maximum efficiency of 97.8% and battery efficiency of 97.0%
- Maximum 15kW PV input power, supporting continuous overload capacity of 110% and unbalanced output of 150%
- Maximum battery charge/discharge current of 50A



High Flexibility

- Large MPPT current, compatible with high-power solar panels
- Advanced parallel function




Safety & Reliability

- Key components from international renowned brands
- IP65 protection rating, ensuring adaptability to complex outdoor environment
- Multiple built-in protections, with optional AFCI 2.0



Intelligent Maintenance

- Quick commission via mobile app, 24/7 remote monitoring, configuration and upgrade
- Advanced energy management mechanism, with multiple built-in working modes and flexible customized settings"

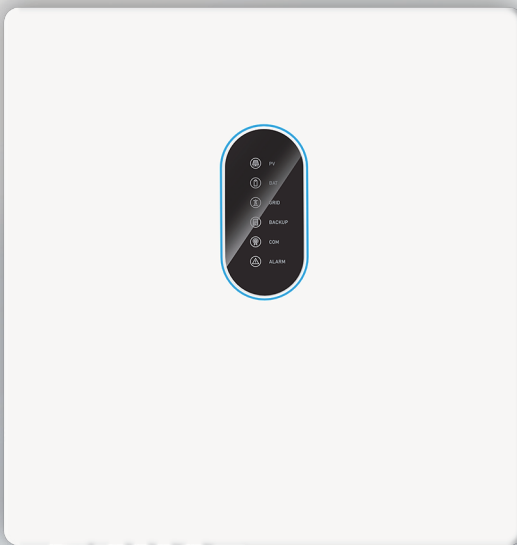

THREE
PHASE
& HV
BATTERY



	SE 5KHB-D3P	SE 6KHB-D3P	SE 8KHB-D3P	SE 10KHB-D3P
Efficiency				
Max. Efficiency (PV to AC)	97.3%	97.3%	97.8%	97.8%
European Efficiency (PV to AC)	96.7%	96.7%	97.0%	97.0%
Input (PV)				
Max. PV Usable Power	15,000W			
Max. PV Input Voltage	1,000V			
Start-up Voltage	120V			
MPPT Operating Voltage Range	160V-950V			
Max. Input Current per MPPT	20A/30A			
Max. Short Circuit Current per MPPT	30A/40A			
No. of MPP Trackers	2			
No. of Strings per MPP Tracker	1/2			
Input/Output (BAT)				
Battery Type	Lithium-ion/Lead-acid			
Nominal Battery Voltage	250V-600V			
Battery Voltage Range	120V-600V			
Max. Charge/Discharge Current	50A/50A			
Max. Charge/Discharge Power	15,000W/5,800W	15,000W/7,000W	15,000W/9,100W	15,000W/11,300W
Output (Grid)				
Nominal AC Output Power	5,000W	6,000W	8,000W	10,000W
Max. AC Output Apparent Power	5,500VA	6,600VA	8,800VA	11,000VA
Max. AC Output Power (PF=1)	5,500W	6,600W	8,800W	11,000W
Max. AC Output Current	3*8.3A	3*10A	3*13.3A	3*16.7A
Max. Single Phase Power	2,500W	3,000W	4,000W	5,000W
Max. Input Power	15,800W			
Max. Input Current	3*25A			
Nominal Voltage	380V/400V/415V, 3W+N+PE			
Grid Voltage Range	260V-520V (Adjustable)			
Nominal Grid Frequency	50Hz/60Hz			
AC Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)			
Power Factor	> 0.99@rated power (Adjustable 0.8 LD - 0.8 LG)			
THDI	<5%@Rated Power			
Output (Back up)				
Nominal Output Power	5,000W	6,000W	8,000W	10,000W
Nominal Output Current	3*7.6A	3*9.1A	3*12.2A	3*15.2A
Max. Single Phase Power	2,500W	3,000W	4,000W	5,000W
Peak Output Apparent Power (5min)	6,000VA	7,200VA	9,600VA	12,000VA
Peak Output Apparent Power (10s)	7,500VA	9,000VA	12,000VA	15,000VA
Nominal Output Voltage	380V/400V/415V, 3W+N+PE			
Nominal Output Frequency	50Hz/60Hz			
Transfer Time	< 10ms (Typical)			
THDV	<3%@100% R Load			
Protection				
Protection Category	Class I			
PV Switch	Yes			
Anti-islanding Protection	Yes			
AC Overcurrent Protection	Yes			
DC/AC Overvoltage Protection	DC Type II, AC Type III			
AC Short Circuit Protection	Yes			
DC Reverse Protection	Yes			
Surge Arrester	DC Type II, AC Type II			
Insulation Resistance Detection	Yes			
Leakage Current Protection	Yes			
GFCI	Yes			
AFCI 2.0/RSD	Optional			
General				
Max. Operation Altitude	4,000m (>2,000m derating)			
Ingress Protection Degree	IP65			
Operating Temperature Range	-25°C-60°C (>45°C derating)			
Relative Humidity	0~100%			
Cooling Method	Natural Cooling			
Mounting	Wall bracket			
Dimensions (W*H*D)	560mm*580mm*218.3 mm			
Weight	32kg			
PV Connection Way	MC4/H4			
HMI & COM				
Display	APP+LED, LCD (Optional)			
Communication Interface	RS485/CAN (for BMS), DRM, RS485 (for Meter), Wi-Fi/LAN (Optional, for Portal)			
Certification				
Safety	IEC/EN 62109-1&2			
EMC	IEC/EN 61000			
Grid Code	VDE 4105, EN 50549-1, CEI 0-21, PPDS, RD 1699/661/647/413, UNE 217002, AS 4777.2, C10/11, G98/G100, IEC 61727/62116			
Warranty	5 Years/10 Years (Optional)			

Remarks: · The range of output voltage and frequency may vary depending on different grid codes.
· Specifications are subject to change without advanced notice.

