


SINGLE PHASE & DUAL MPPT

SE 7/8/10KTL-D1P

Application: Residential Use

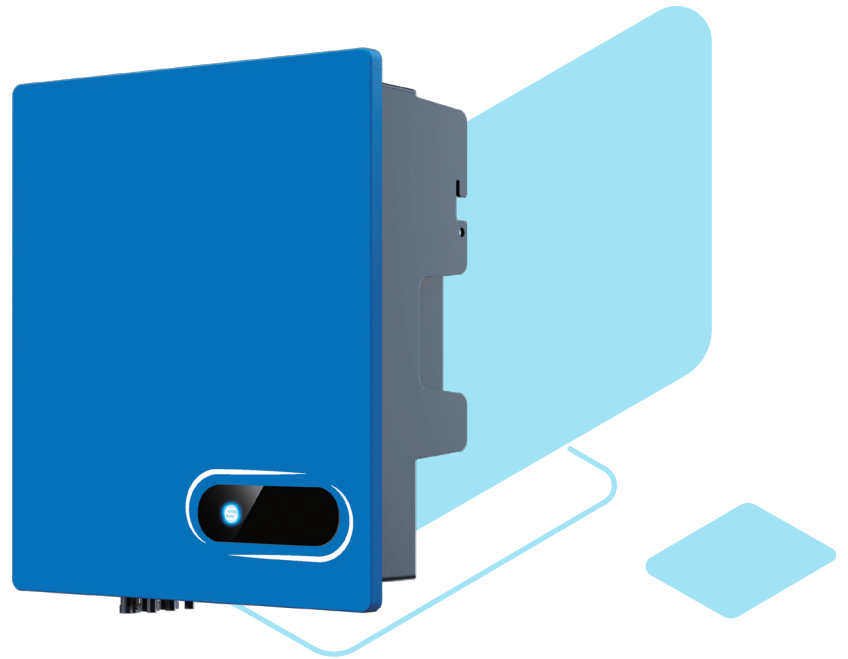

SUPERIOR PERFORMANCE

- Maximum efficiency of 98.2%
- Large string current, compatible with large PV modules
- Wide voltage range, compatible with various power grids



HIGH RELIABILITY

- IP65 protection level for outdoor installation
- Optional: DC/AC Type II SPD
- Optional: AFCI function



INTELLIGENT MAINTENANCE

- Power consumption monitoring
- Remote configuration and upgrade
- Quick commissioning via mobile app
- Multiple I/O and communication configurations

Model	SE 7KTL-D1P	SE 8KTL-D1P	SE 10KTL-D1P
Efficiency			
Max. Efficiency	98.2%		
European Efficiency	97.5%		
Input (PV)			
Max. Input Voltage	550V		
Max. PV Configuration (STC)	150%		
Rated Input Voltage	360V		
Max. Input Current	20A/20A	20A/30A	
Max.Short Circuit Current	26A/26A	26A/40A	
Start Input Voltage	90V		
MPPT Operating Voltage Range	60V-540V		
Max. Number of PV Strings	1/1	1/2	
No. of MPPTs	2		
Output (Grid)			
Rated AC Active Power	7,000W	8,000W	10,000W
Max. AC Apparent Power	7,700VA	8,800VA	10,000VA
Max. AC Output Current	35A	40A	45.5A
Rated AC Voltage	220V/230V, L+N+PE		
AC Voltage Range ^①	160V-300V (Adjustable)		
Rated Grid Frequency	50Hz / 60Hz		
Grid Frequency Range ^②	45Hz-55Hz / 55Hz-65Hz (Adjustable)		
THDI	<3% (Rated Power)		
DC Current Injection	<0.5%In		
Power Factor	>0.99 Rated power (Adjustable 0.8 LD - 0.8 LG)		
Protection			
DC Switch	Yes		
Anti-Islanding Protection	Yes		
AC Overcurrent Protection	Yes		
AC Short Circuit Protection	Yes		
DC Reverse Protection	Yes		
Surge Arrester	DC Type III(Type II optional) / AC Type III(Type II optional)		
Insulation Detection	Yes		
Leakage Current Protection	Yes		
General			
Topology	Transformerless		
IP Rating	IP65		
Night Self Consumption	<1W (Standard)		
Cooling	Natural cooling		
Operating Temperature Range	-25 °C -60 °C		
Relative Humidity Range	0-100%		
Max. Operating Altitude	4000m		
Dimensions (W*H*D)	400mm*450mm*170mm		
Weight	16Kg		
HMI & COM			
Display	Wireless & APP+LED, LCD (Optional)		
Communication	Optional: WiFi / GPRS / RS485 / LAN		
Certification			
Safety	IEC62109-1, IEC62109-2		
Grid Code	DE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206001/206002-1, IEC 61727/62116, ORDINANCE n°140 2022, IEEE 1547, UL 1741, AS 4777, VDE 0126-1		
Warranty	5 Years		

Remarks: · ^{①②}The range of output voltage and frequency may vary depending on different grid codes.
· Specifications are subject to change without advanced notice.